



WI-PS526GV
24FE+2GE+2SFP Ports 48V
VoIP PoE Switch
with 24-Port PoE Datasheet



www.wireless-tek.com



Highlights

- 24 100Mbps Ports with 24 PoE, 2 Gigabit Ports+2SFP Fiber
- Port VLAN function prevent voice data obstruct
- Qos for Voice, smooth transmit VOIP data
- Supports PoE IEEE 802.3af/at compliant PDs
- Supports PoE power up to 30W for each port
- Internal power adapter supply 150W
- Support 250meter Long-Range PoE Transmit



Typical Applications

VoIP PoE Switch

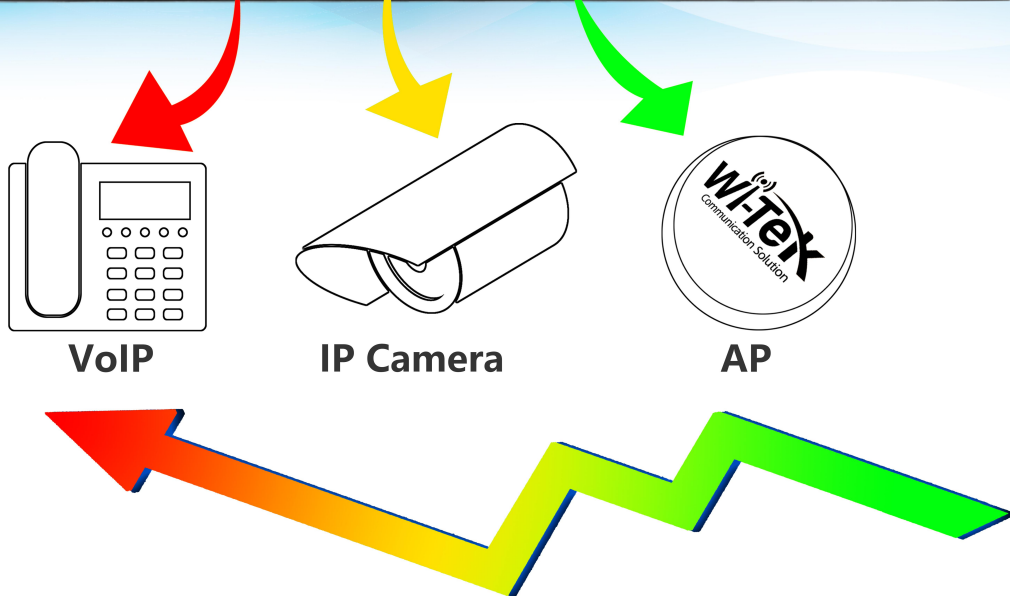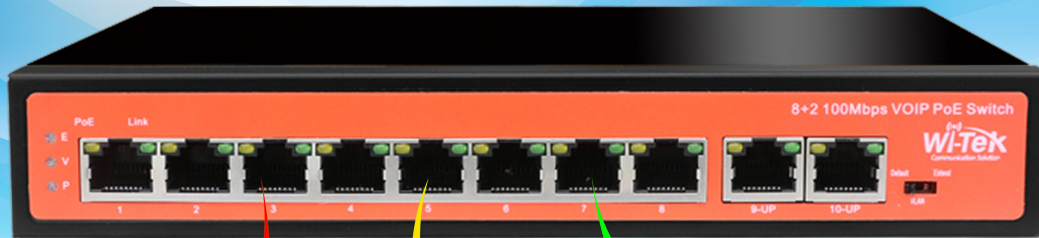

Speed Up Voice Data Transfer

WI-PS505V
6FE Ports

WI-PS510V
10FE Ports

WI-PS518GV
16FE+2GE+1SFP Ports

WI-PS526GV
24FE+2GE+2SFP Ports

WI-PS150GFV
48FE+2GE+2SFP Ports

Support below brand VOIP PHONE

Yealink

Fanvil

3CX

Description

What This Product Does

24*100Mbps+2 Gigabit ports+2SFP Fiber Switch with 24-Port unmanaged PoE switch design for SMB VoIP application provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). Based on Port priority: define 2 level group ports to keep VoIP ports high priority transfer, Leve-1 Ports group is Ports1-16 and 2 uplink ports, Leve-2 Ports group is Ports17-24, so you can connect VoIP phone to Port 1-16 for keep fastest data transmit to uplink ports

Easy To Use

WI-PS526GV is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI-PS526GV 26-Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

Specifications

HARDWARE FEATURES

Interface	<p>24 100M POE+2Gigabit Ports</p> <p>2 1000M SFP Fiber</p>
Network Media	<p>10Base -T: Pair 2 Category 3(Cat3) and above UTP/STP(≤100m)</p> <p>100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m)</p> <p>1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m)</p> <p>1000Base-SX:62.5μm/50μm MMF(2m~550m)</p> <p>1000Base-LX:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)</p>
Fan Quantity	Fanless
Power Consumption	150W (max. with PoE device connected)
External Power Supply	AC 110~265V 50/60HZ
PoE Ports (RJ45)	<p>Standard: 802.3 af/at compliant</p> <p>PoE Ports: Port1- Port24</p> <p>Power Supply: 150W</p>
Exchange Capacity	12.8G
Mac Address	8K

HARDWARE FEATURES

Table	
Dimensions	Product Size: 440mm*290mm*45mm (L*W*H)

SOFTWARE FEATURES

Transmission Method	Store-And-Forward
Advanced Functions	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS

Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Guide Book/Warranty Card 2L Shape Mount+4 Shim
Environment	Working Temperature: 0°C~40°C

OTHERS

Storage temperature :

-40°C ~ 70°C

Working Humidity :

10% ~ 90% RH

non-condensing

Storage Humidity:

5% ~ 90% RH non-condensing