

# CAT6A PATCH CORD (SLIM TYPE) UNSHIELDED (BARE COPPER)



## SKU: 077 SERIES

### DESCRIPTION

CAT6A Mold-Injection Snagless Patch Cord, 28 AWG Stranded PVC Jacket - Slim Type

### FEATURES

- Supports IEEE 802.3at (PoE+ Type 2), IEEE802.3bt (PoE++ Type 3)
- Bare Copper Stranded Conductors
- Unshielded RJ45 Modular Plugs
- 8P8C Gold-Plated Pins
- T568B Wiring Color Code
- RoHS Compliant, UL
- Meets or exceeds ANSI/TIA 568C.2 and 568-2.D

#### Conductor

Size 28 AWG Stranded  
Material Bare Copper (7/0.127)

#### Jacket

Material PVC, CM Rated  
Diameter 0.15 in. (3.8 mm)

#### Connectors

RJ45 8P/8C  
Contacts/Pins Gold-Plated

#### Electrical Test

100% Test (open. short, miss wire)  
Contact resistance: 2 ohm max.  
Insulation Resistance: 10 M ohm min.  
Hi-Pot: 300 V DC/ 10ms

#### Approvals


UL Listed, ANSI/TIA-568-C.2, ISO/IEC 11801  
CAT6A standards

#### Available Colors

Black, Blue, Green, Gray, Orange,  
Purple, Red, White, Yellow

#### Weights:

0.5 FT - 0.036 LB  
1 FT - 0.042 LB  
2 FT - 0.06 LB  
3 FT - 0.07 LB  
5 FT - 0.08 LB  
7 FT - 0.11 LB  
10 FT - 0.15 LB  
14 FT - 0.201 LB  
25 FT - 0.31 LB

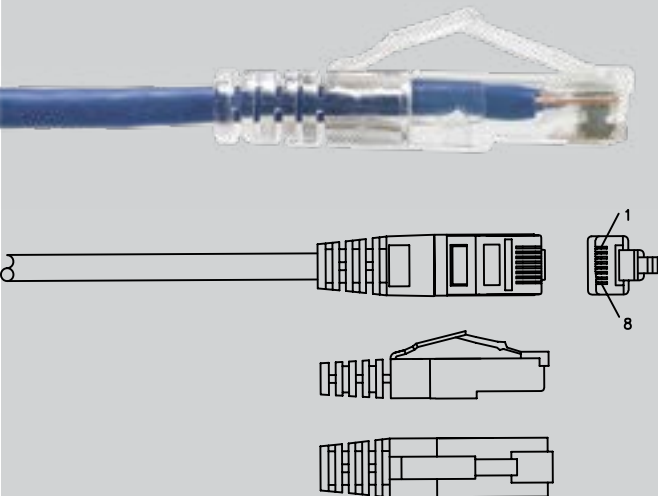

Multiple lengths available

**CHANNEL FLUKE TESTS ATTACHED**

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 05/2022

Subject to change without notice